

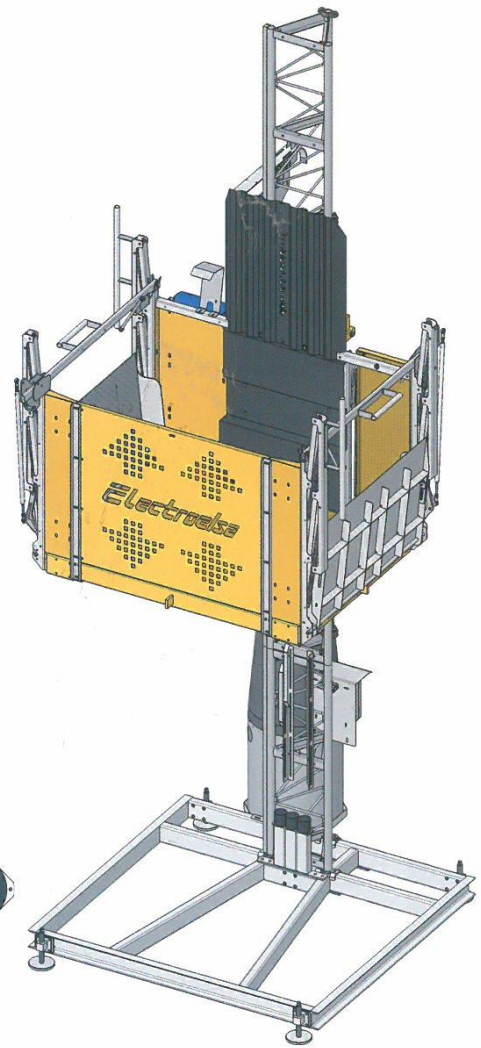


EHPM 900 EHM 900

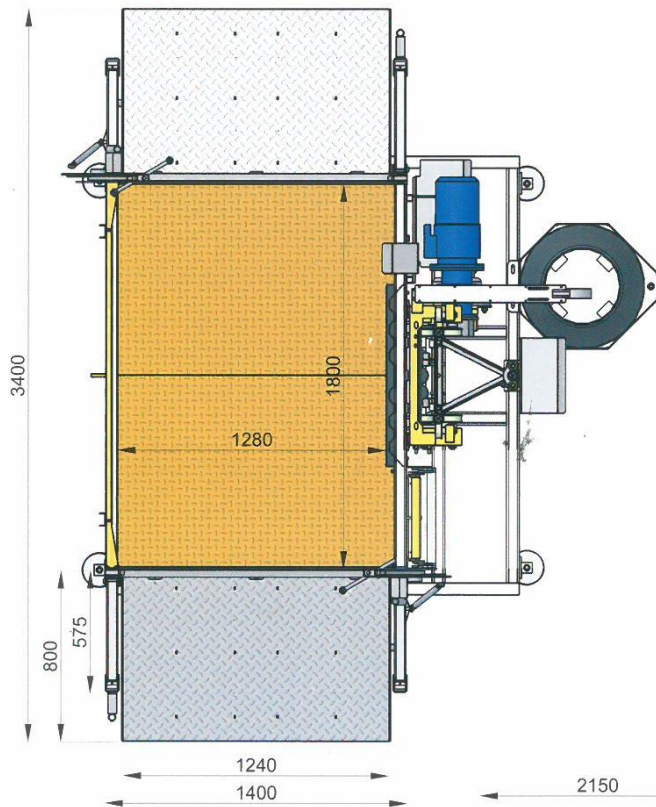


	900 kg trifase	EHM
↑	+800 kg	EHPM
↑↑	+700 kg	
↑↑↑	+600 kg	
↑↑↑↑	+500 kg	
↑↑↑↑↑	+400 kg	
↑↑↑↑↑↑	+300 kg	
↑↑↑↑↑↑↑	+200 kg	
↑↑↑↑↑↑↑↑	+100 kg	

PIATTAFORMA DI TRASPORTO / MONTACARICHI TRANSPORT PLATFORM / MATERIAL HOIST


Dati tecnici	Technical Data	Données Techniques	Datos Tecnicos	EHPM 900 trifase	EHM 900 trifase
Capacità di carico	Capacity	Charge Nominale	Capacidad de carga	900 kg	900 kg
Velocità di sollevamento	Lifting speed	Vitesse de lévage	Velocidad de elevación	12 m/min	20 m/min
Massima altezza ancorata	Max anchored height	Hauter max avec ancrages	Altura max con anclajes	120 m	120 m
Dimensioni interne cesta	Platform dimensions	Dimensions du plancher	Dimensiones de cabina	1,88 x 1,34 m	1,88 x 1,34 m
Tensione alimentazione	Input power range	Tension d'alimentation	Tensión de red	380/415 V 50/60 Hz	380/415 V 50/60 Hz
Interruttore protezione linea	Protection switch	Interrupteur de protection	Interruptor de protección	16 A	16 A
Potenza servizio continuo	Power of the motors	Puissance des moteurs	Potencia de motorreductores	1 x 4 kW	2 x 3 kW
Corrente di spunto	Starting current	Ampérage au démarrage	Intensidad de arranque	66 A	90 A
Minima potenza di linea consigliata	Minimum line power suggested	Min. puissance de ligne conseillée	Min. potencia de linea	6 kW	10 kW

EHPM 900 EHM 900

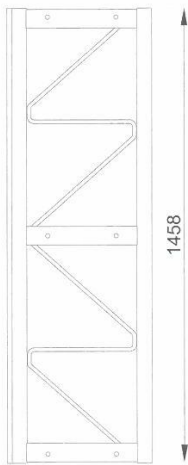


Compatibile con:
Interchangeability:


EHM 900
EHM 1200
EHM 2500/15
EHM 2500/25
EHPM 900
EHPM 1200
EHPM 2500/15
EHPM 2500/25
EHP 400
EHP 800




52 kg

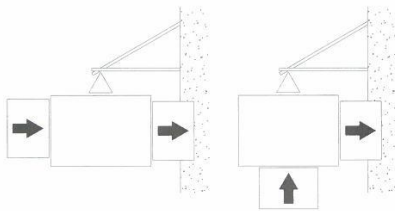

Configurazioni d'accesso possibili
Possible access configurations



Freno d'emergenza
ad arresto progressivo
Overspeed safety device
with progressive stop



Quattro vitoni di livellamento
Four levelling screw-jacks

